


POSI 200

IN-LINE LABELER

Our Posi 200 automatically affixes pressure-sensitive labels to the top and/or bottom of flexible packages, rigid modified atmosphere trays, boxes, and a wide variety of finished products. Posi 200 is well-suited for in-line labeling applications fed directly from food packaging machines and can be configured for either left-to-right or right-to-left operation.

Features:

- Constructed of primarily stainless steel and Delrin material and built to NEMA 4 specifications for wash down compatibility
- User-friendly NEMA 4 rated touch screen controls include graphics to illustrate operator parameters. Stores up to 26 product programs.
- Small footprint
- Quick-release conveyor belts can be easily cleaned for thorough sanitizing and inspection
 - Self-guiding 12" wide conveyor belt is designed to transport products up to 17" wide. No need for alignment adjustments to end rollers.
 - Bottom labeler head is equipped with a slide out feature for easy label threading
 - NEMA 34 hi-torque stepper motors with 7A (RMS) drives capable of operating at 60 meters per minute
- Distance encoder to maintain registration
- Low energy consumption (220VAC draws less than 4 Amps; 110VAC draws less than 8 Amps)
- Locking casters and levelers
 - Designed and built by Koch Equipment in the USA

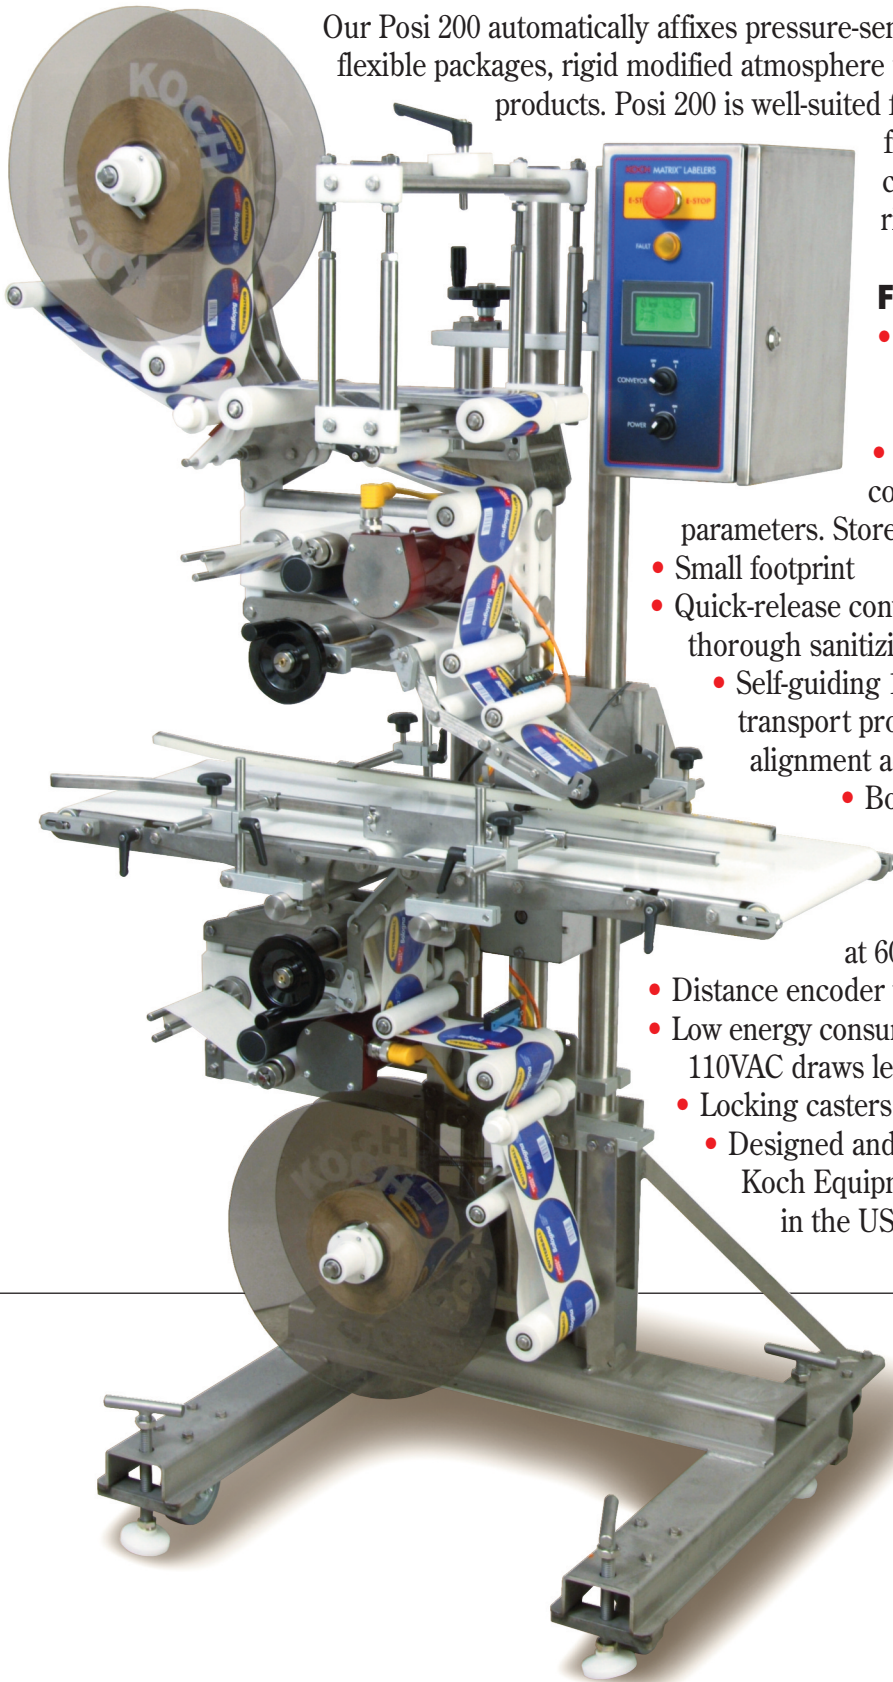

KOCH

P O S I 2 0 0

IN-LINE LABELER

Optional:

- Servo upgrades available to achieve higher speeds
- Various guide rail and product sensor kits available to handle any size product
- Printer options include:
 - Reciprocating ink
 - Hot foil
 - Thermal transfer
 - Laser
 - Ink jet

Technical Specifications:

Electrical:

- 120 or 220 volt
- 208-240VAC – 3 Amp
- 110-120VAC – 6 Amp

Maximum roll weights:

- Standard Torque – 15-lb. roll
- High Torque – 20-lb. roll
- Servo – 25-lb. roll

Label head weight: approx. 55-lbs.

Conveyor height: Adjustable based on application needs and number of label heads

Conveyor capacity:

- 12" Conveyor – 17" maximum package width

Conveyor length: 948.94mm (37 3/8")

Overall machine length: 973.99mm (38 3/8")

Overall machine height: based on application needs

Conveyor Speeds:

- Minimum: 250mm/sec. [49-ft./min.]
- Maximum: 1000mm/sec. [197-ft./min.]



 **SCALES SHOP**
customized weighing and packaging systems

www.thescaleshop.net

1-888-844-2031