


## MASSAGERS



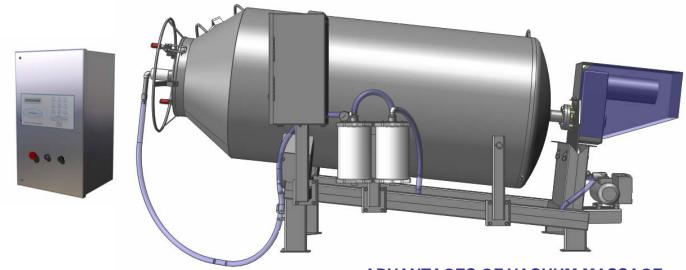

## STANDARD FEATURES

- Stainless steel welded construction
- Helicoidal paddle used for a perfect massaging action
- MC-40 computerized controls
- Reverse rotation to unload
- Front wheels for better rotation
- Direct drive system (no chains or belt)
- Double water separator system

## ADVANTAGES OF VACUUM MASSAGE

- Excellent water retention
- Color stability and consistency
- Higher homogeneity of products
- Overnight operations
- Great combination with Sipromac injector
- Prevents air pockets
- Improved distribution of brine
- Considerable increase in weight
- Time saving
- Maximum hygiene

| SPECIFICATIONS   |                       |                       |           |                        |                        |                        |
|--|-----------------------|-----------------------|-----------|------------------------|------------------------|------------------------|
| Options: Cleaning door for inspection, loading system, adjustable legs, load cells |                       |                       |           |                        |                        |                        |
| MODEL  | VT 1000               | VT 2000               | VT 4000   | VT 6000                | VT 8000                | VT 10000               |
| CAPACITY (Lbs of cured meat)   | 1000                  | 2000                  | 4000      | 6000                   | 8000                   | 10000                  |
| Overall dimension (L x W x H) in.  | 106x73x76             | 155x74x73             | 166x85x83 | 181x90x87              | 206x90x87              | 203x94x91              |
| Overall dimension (L x W) mm   | 2680x1834             | 3930x1876             | 4200x2160 | 4587x2264              | 5233x2264              | 5148x2387              |
| (H) mm   | 1908                  | 1850                  | 2099      | 2195                   | 2195                   | 2308                   |
| Vacuum pump  | 21 m <sup>3</sup> /hr | 40 m <sup>3</sup> /hr | 63 m³/hr  | 100 m <sup>3</sup> /hr | 100 m <sup>3</sup> /hr | 160 m <sup>3</sup> /hr |
| Electrical power (kW)  | 2.0                   | 3.3                   | 4.7       | 7.7                    | 9.6                    | 13.5                   |

\*Sipromac reserves the right to make technical changes without notification



www.thescaleshop.net 1-888-844-2031